



www.md-europe.eu

MDV-YSC

CAST ST.ST. PISTON TYPE CHECK VALVE

SPECIFICATIONS:

full bore, Y-type, screwed in bonnet
 PTFE disc, st.st. spring
 thread f/f ISO 228-1G
also available ex mill as MDV-YSCN with NPT thread
 nominal pressure
 DN 8 (1/4") - DN25 (1"): PN63
 DN 32 (1.1/4") - DN 50 (2"): PN40
 PTFE seats and seals
 temperature -20°C upto 180°C

GEGOTEN RVS VEERBELAST TYPE TERUGSLAGKLEP

SPECIFICATIES:

volle doorlaat, Y-type, geschroefde deksel
 PTFE klep, rvs veer
 draad bi-bi ISO 228-1G
ook leverbaar af fabriek als MDV-YSCN met NPT draad
 nominale druk
 DN 8 (1/4") - DN25 (1"): PN63
 DN 32 (1.1/4") - DN 50 (2"): PN40
 PTFE zittingen en afdichtingen
 temperatuur -20°C tot +180°C


DIMENSIONS

AFMETINGEN		P	L	B	C											kg/st	CF8	CF8M
DN	"	mm	mm	mm	mm											kg/pc	304	316
DN 8	1/4"	11	65	46	19											0,30	o	o
DN 10	3/8"	13	65	46	19											0,30	o	o
DN 15	1/2"	15	65	46	19											0,30	o	o
DN 20	3/4"	20	80	58	23											0,40	o	o
DN 25	1"	25	90	69	27											0,80	o	o
DN 32	1.1/4"	32	105	75	32											1,00	o	o
DN 40	1.1/2"	40	120	85	41											1,50	o	o
DN 50	2"	50	140	98	50											2,20	o	o

nr	part name	naam onderdeel	CF8	CF8M	pc
			304	316	st
1	body	huis	ASTM A 351 CF8	ASTM A 351 CF8M	1
2	bonnet	deksel	ASTM A 351 CF8	ASTM A 351 CF8M	1
3	spring	veer	ASTM 276 SS316	ASTM 276 SS316	1
4	disc	klep	PTFE	PTFE	1
5	seat	zitting	PTFE	PTFE	1
6	washer	ring	ASTM 276 SS316	ASTM 276 SS316	1
7	nut	moer	ASTM 276 SS316	ASTM 276 SS316	1
8	body seal	packing	PTFE	PTFE	1

• stock, s.u.
 o ex mill

• voorraad m.o
 o af fabriek

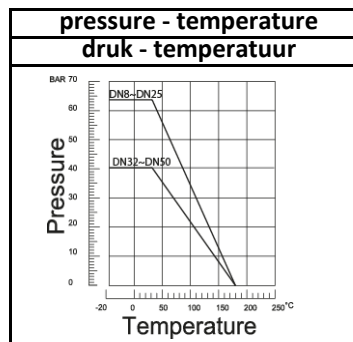

MDV-YSC

